

PROJECT NAME:	DATE:
LOCATION:	AIA #:
MANUFACTURER REPRESENTATIVE:	
ITEM # / QUANTITY:	

# DRYAGER™ UX 750 PRO

## FOR UP TO 44 lbs



Professional refrigerated full height single section dry aging cabinet for commercial production of **dry-aged meat, charcuterie, fish** as well as for producing and storing of **cheese** in foodservice, hospitality, retail and food processing industries. **Self-contained R600a refrigeration** (115V - 2A) maintains perfect microclimate with electronic temperature (32-77 °F) and humidity (60-90%) control for minimal product loss **without the requirement for water connection or drain**. Unique UX-Aireg **UV sterilization system** maintains internal air quality and flow without UV exposure of the product. Stainless steel exterior and antibacterial polystyrene interior with integral rack slides and stainless steel back cover. Cabinet designed for **built-in or free-standing application** for single section or multi-unit integration. Two years parts and labor warranty – five years compressor warranty.

### STANDARD FEATURES

#### Temperature & Humidity

- Humicontrol™ – steady humidity electronically controlled from 60% to 90% without the requirement for water connection or drain
- Electronically controlled temperature from 32 °F to 77 °F (0 °C to +25 °C)
- Superior aging with minimal weight loss
- Automatic defrost and automatic condensation evaporation

#### Hygiene

- UVC sterilization system UX Aireg™ – optimal airflow & air quality without UV exposure of the product
- Antibacterial interior with molded slides and coved corners

#### Visual design

- Stainless steel exterior and door frame
- UX LED™ lighting – perfect lighting of displayed products
- Maximum visual appeal & merchandising potential

#### Safety

- UV protection through tinted double pane glass door
- Visual & audible alarm
- Lockable door and snap-in magnetic gasket

#### Modularity

- Cabinet designed for free-standing or built in application for single section or multiple units
- Door hinges reversible

#### Included accessories: XL accessory package

- 1 x Full shelf (DUS025) & bottom shelf (DUS024) - stainless steel, max. load/shelf 44 lbs
- 1 x SALTAIR tray (DU0075) - stainless steel
- 1 x Hanger (DU0012) - stainless steel, max. load 88 lbs
- 2 x Swivel hook - stainless steel, max. load/hook 220 lbs

#### Warranty

- Compressor: 5 years, parts & labor: 2 years



#### Conformity

UL 60335-1: 2016  
 UL 60335-2-89: 2017  
 CAN/CSA-C22.2 No. 60335-1:16  
 CAN/CSA-C22.2 No. 60335-2-89:17  
 NSF/ANSI 7: 2016



### TECHNICAL SPECIFICATIONS


Internal capacity/net	5.3/4.7 cu. ft. (151/133 liters)	External housing finish	Stainless steel
Maximum load	44 lbs (20 kg)	Door material	Stainless steel & metallic tinted glass (UV protect)
Internal Dimensions HxWxD	28.03 x 19.29 x 17.20 in	Door reversible & lockable	Yes
External Dimensions HxWxD	35.63 x 23.62 x 24.02 in	Magnetic door seal, exchangeable	Yes
Temperature range	0 °C to +25 °C (32 °F to 77 °F)	Door handle	Robust
Humicontrol™	60% to 90%	Alarm	Visual & acoustic
Connection rating	115V / 2A / 60Hz	Installation	Integration & free standing
NEMA plug configuration	5-15P	Ambient temperature	10 °C to 35 °C (50 °F to 95 °F)
Average energy consumption	~1.7 kWh / 24h	Refrigerant	R600a
UVC sterilisation system	Yes	Empty weight	106 lbs
Water and drain connection required	No	Shipping weight (on pallet)	185 lbs
Automatic defrost	Yes	Shipping dimensions HxWxD (on pallet)	60.00 x 42.00 x 42.00 in
Automatic condensation evaporation	Yes		

# DRYAGER™ UX 750 PRO


FOR UP TO 44 lbs

## DRAWINGS

Front view




Top view

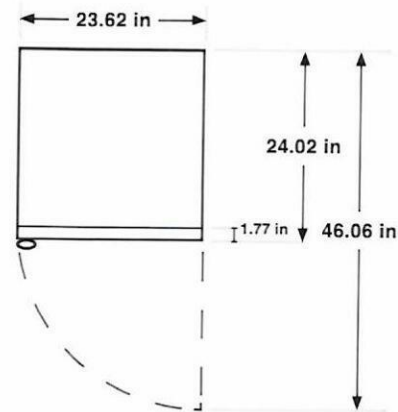


## Integration drawing

Single unit integration

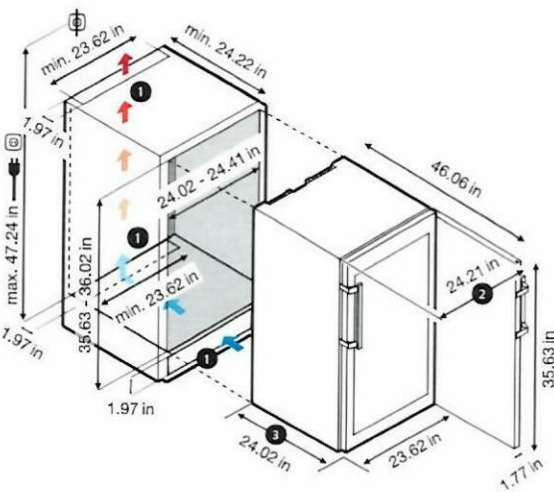

Side by Side integration

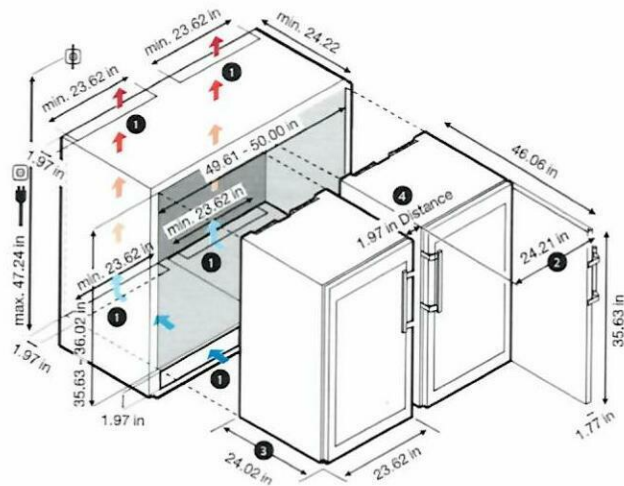

• It is absolutely essential to have good air circulation around the unit. The width of the ventilation shafts needs to be at least the width of the appliance (see ❶). The minimum required depth/height of the shafts is **1.97 in**. Also ensure that the back of the appliance is positioned at a distance of at least 1.97 in from the wall.

• Overall dimension with opened door (see ❷): **24.21 in**.

• Overall dimension body + door (protruding) (see ❸): **24.02 in**.

• Covering of distance (see ❹) possible by DRYAGER™ moulding, available as an accessory at: [shop.dry-ager.com](http://shop.dry-ager.com).